

Data sheet

MCX15B

Programmable controller



MCX15B is fitted with or without graphic LCD display. It is an electronic controller that stands on the top of the MCX range, thanks to the large number of its inputs and outputs.

It holds all the typical functionalities of MCX controllers:

- programmability
- connection to the CANbus local network
- up to two Modbus RS485 opto-insulated serial
- interface

Furthermore it is available in two models, powered at 110 / 230 V AC or 24 V AC

Features MCX15B

- 10 analog and 18 digital inputs
- 6 analog and 15 digital outputs
- Power supply 24 V AC / 20/60 V DC and 110 V / 230 V AC
- Remote access to data through CANbus connection for additional display (LCD available) and keyboard
- RTC clock for managing weekly time programs and data logging information
- Up to two Modbus RS485 opto-insulated serial interface
- Available with graphic LCD display for showing the desired information and without display
- Dimensions 16 DIN modules


General features

FEATURES	DESCRIPTION
Power supply	85 – 265 V AC, 50/60 Hz Maximum power consumption: 26 V A Insulation between power supply and the extra-low voltage: reinforced 20 – 60 V DC and 24 V AC $\pm$ 15% 50/60 Hz Maximum power consumption: 12 W, 20 V A Insulation between power supply and the extra-low voltage: functional
Plastic housing	DIN rail mounting complying with EN 60715 Self extinguishing V0 according to IEC 60695-11-10 and glowing/hot wire test at 960 °C according to IEC 60695-2-12
Ball test	125 °C according to IEC 60730-1 Leakage current: $\geq$ 250 V according to IEC 60112
Operating conditions	CE: -20T60 / UL: 0T55, 90% RH non-condensing
Storage conditions	-30T80, 90% RH non-condensing
Integration	In Class I and / or II appliances
Index of protection	IP40 only on the front cover
Period of electric stress across insulating parts	Long
Resistance to heat and fire	Category D
Immunity against voltage surges	Category II
Software class and structure	Class A
Approvals	CE compliance: This product is designed to comply with the following EU standards: • Low voltage guideline: 73/23/EEC • Electromagnetic compatibility EMC: 89/336/EEC and with the following norms: – EN61000-6-1, EN61000-6-3 (immunity for residential, commercial and light-industrial environments) – EN61000-6-2, EN61000-6-4 (immunity and emission standard for industrial environments) – EN60730 (Automatic electrical controls for household and similar use) UL approval: • UL file E31024

Input/output

I/O	TYPE	NUM	SPECIFICATIONS
Analog inputs	NTC, 0 / 1 V, 0 / 5 V	4	AI7, AI8, AI9, AI10 Analog inputs selectable via software between: • NTC temperature probes, default: 10 kΩ at 25 °C • pressure transducers with 0 / 5 V output
	Universal	6	AI1, AI2, AI3, AI4, AI5, AI6 Universal analog inputs selectable via software between: • ON/OFF (current: 20 mA) • 0 / 1 V, 0 / 5 V, 0 / 10 V • 0 / 20 mA, 4 / 20 mA • NTC (10 kΩ at 25 °C) • Pt1000 12 V+ power supply 12 V DC, 200 mA max for 4 / 20 mA transmitter (total on all outputs) 5 V+ power supply 5 V DC, 210 mA max for 0 / 5 V transmitter (total on all outputs)
Digital inputs	24 V optoins.	18	DI1, DI2, DI3, DI4, DI5, DI6, DI7, DI8, DI9, DI10, DI11, DI12, DI13, DI14, DI15, DI16, DI17, DI18 Digital Inputs optoinsulated 24 V AC 50/60 Hz o 24 V DC
	230 V AC optoins.	4	DIH1, DIH2, DIH3, DIH4 Inputs optoinsulated, 230 V AC 50/60 Hz Basic insulation Rated current: 2 mA at 230 V AC; 1 mA at 110 V AC NOTE: when the 230 V AC DIH1 input is used, the corresponding 24 V DI1 input is not available anymore; the same for the couple of inputs DIH2 and DI2, DIH3 and DI3, DIH4 and DI4
Analog outputs	0 / 10 V	4	AO1, AO2, AO3, AO4 Analog outputs optoinsulated 0 / 10 V DC 10 mA max for each output External power supply 24 V AC / V DC
	PWM, PPM	2	AO5, AO6 Analog outputs selectable via software between: • pulsing output, synchronous with the line, at modulation of impulse position (PPM) or modulation of impulse width (PWM) • pulsing output, at modulation of impulse width (PWM) with range 20 Hz to 1 KHz: – open circuit voltage: 6.8 V – minimum load: 1 kΩ
Digital output	Relay	15	Concerning the insulation distance there are three groups of relays: • group 1: relays 1 to 8 • group 2: relays 9 to 13 • group 3: relays 14 to 15 Insulation between relays of the same group: functional Insulation between relays of different groups: reinforced Insulation between relays and the extra-low voltage parts: reinforced Total current load limit: 92 A C1-NO1, C2-NO2, C3-NO3, C4-NO4, C5-NO5, C6-NO6, C7-NO7, C8-NO8 C9-NO9 Normally open contact relays 8 A • characteristics of each relay: – 6 A 250 V AC for resistive loads - 100.000 cycles – 4 A 250 V AC for inductive loads - 100.000 cycles with cos(phi) = 0.6 – UL: 240 V AC - 4 A resistive - 3.6 FLA - 21.6 LRA - 346 V A pilot duty 30.000 cycles C10-NO10-NC10, C11-NO11-NC11, C12-NO12-NC12, C13-NO13-NC13 Changeover contacts relay 8 A • characteristics of each relay: – 6 A 250 V AC for resistive loads - 100.000 cycles – 4 A 250 V AC for inductive loads - 100.000 cycles with cos(phi) = 0.6 – UL: 240 V AC - 4 A resistive - 3.6 FLA - 21.6 LRA - 346 V A pilot duty 30.000 cycles C14-NO14-NC14, C15-NO15-NC15 High inrush current (80 A - 20 ms) changeover contacts relay 16 A • characteristics of each relay: – 7 A 250 V AC for resistive loads - 100.000 cycles – 3.5 A 230 V AC for inductive loads - 230.000 cycles with cos(phi) = 0.4 – UL: 240 V AC - 6 A resistive - 4.9 FLA - 29.4 LRA - 470 V A pilot duty 30.000 cycles Using of device in case of Tamb = 70 °C has to be according to following requirements: – maximum load admitted for 8 A relay: 4 A 250 V AC – maximum load admitted for 16 A relay: 5 A 250 V AC

Connection diagram

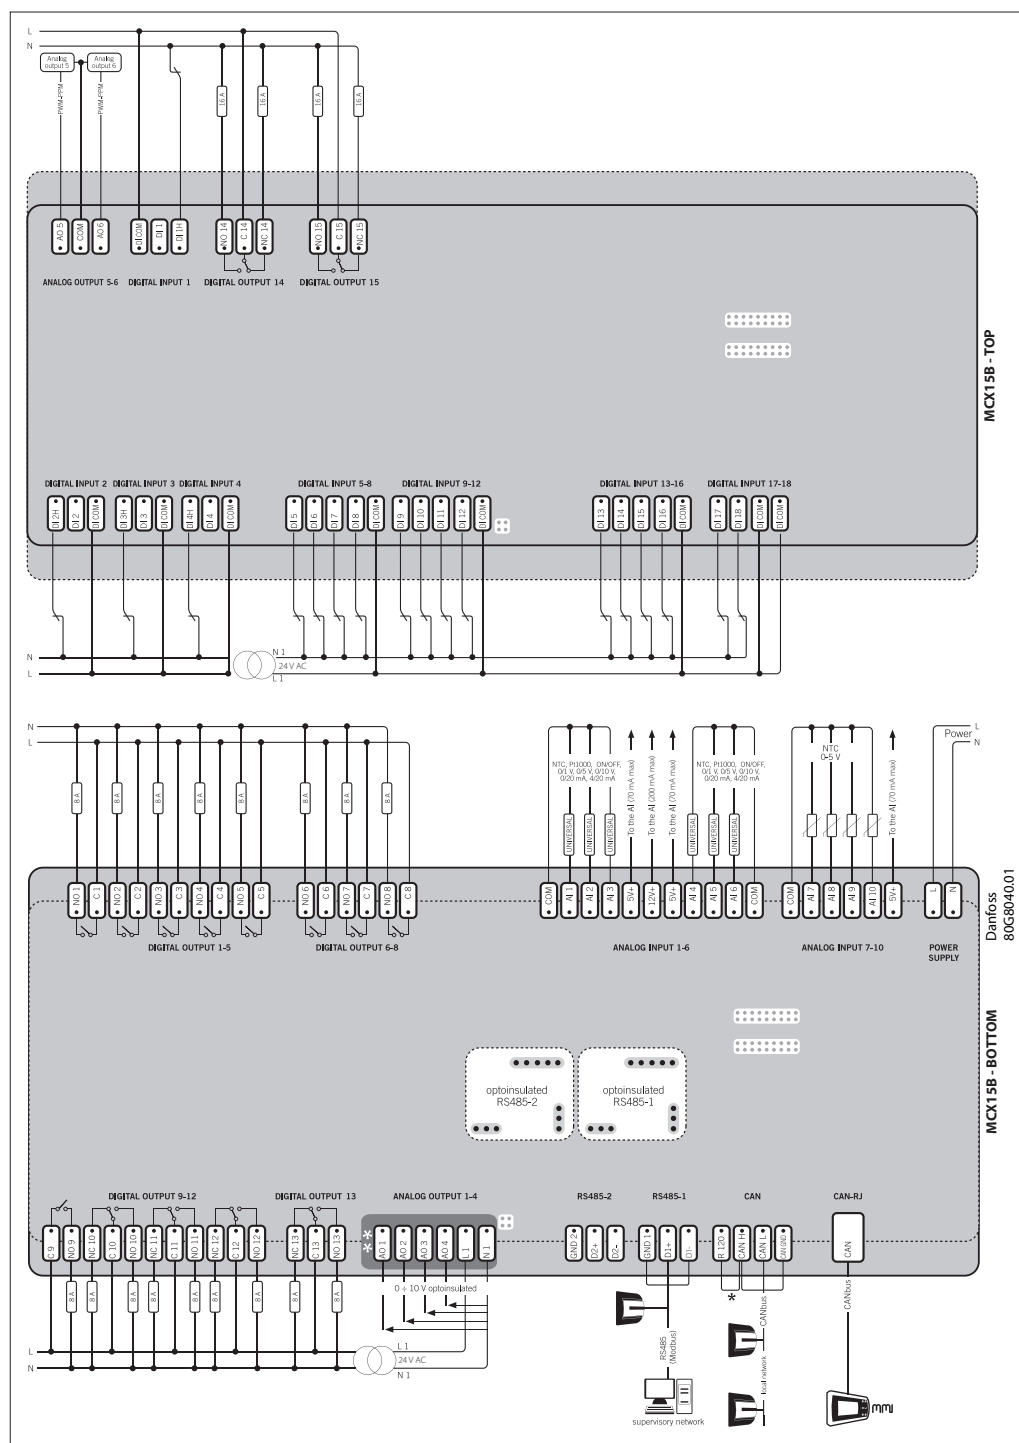


*NOTE: connection has to be made on the first and last local network units, make the connection as close as possible to the connector

**NOTE: optoinsulated analog outputs voltages are referenced to contact N1

Connection

CONNECTORS	TYPE	DIMENSIONS
TOP BOARD		
Analog output 5-6 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 1 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 14 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 15 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 2 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 3 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 4 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 5-8 connector	5 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 9-12 connector	5 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 13-16 connector	5 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital input 17-18 connector	4 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
BOTTOM BOARD		
Analog output 5-6 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 1-5 connector	10 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 6-8 connector	6 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Analog input 1-6 connector	11 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Analog input 7-10 connector	6 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Power supply connector	2 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 9-12 connector	11 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Digital output 13 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
Analog output 1-4 connector	6 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
RS485-2 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
RS485-1 connector	3 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
CAN connector	4 way screw plug-in connector type	- pitch 5 mm - section cable 0.2-2.5 mm²
CAN-RJ connector	6/6 way telephone RJ11 plug type	

Dimensions

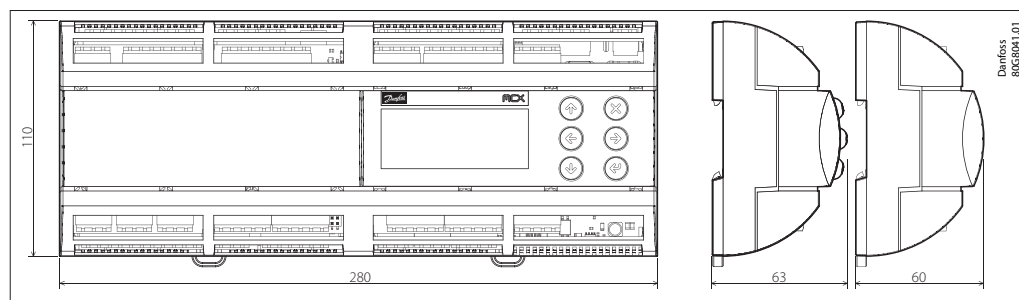

User interface

TYPE	TYPE FEATURES	DESCRIPTION
LCD display	Display	STN blue transmissive
	Backlight	White LED backlight adjustable via software
	Contrast	Adjustable via software
	Format	128x64 dots
	Active visible area	58x29 mm
Keyboard	Number of keys	6
	Keys function	Set by the application software

Product part numbers

DESCRIPTION	CODE NO.
MCX15B, 24V, LCD, RS485, RTC, S	080G0036
MCX15B, 230V, LCD, RS485, RTC, S	080G0037
MCX15B, 24V, RS485, RTC, S	080G0042
MCX15B, 230V, LCD, RS485, RTC, I	080G0127
MCX15B, 24V, RTC, I	080G0130
MCX15B, 24V, RS485, RTC, I	080G0132

*Note: single pack codes (S) include standard kit connectors,
industrial pack codes (I) don't include standard kit connectors*

Accessories part numbers

DESCRIPTION	CODE NO.
MCX15B CONNECTORS KIT	080G0181